

DIN 41612

2E Syscom Inc. - 86 Kendall Avenue - Framingham, MA 01720  
 Tel. 508 620 1678 - www.2esyscom.com - e mail 2e@2esyscom.com


IEC 60603-2

F



- Bauform F in Ergänzung an die DIN 41612  
*Type F in addition to DIN 41612*
- Für Leiterplattenmontage, flache Bauform  
*For PCB assembly, slim line version*
- Isolierkörper aus Polyester (PBT)  
*Material of insulating body: Polyester (PBT)*
- Mit integrierter Kodierung  
*With integrated coding device*
- Vergoldete Kontaktzone  
*Gold-plated mating area*

Polzahl/no of contacts	Gütek./mating class	32 (z + b)	32 (z + d)	48 (z + b + d)	Zubehör/Accessories
Tauchlöt 6 mm, flach Anschlussraster 5,08 x 5,08 mm <i>solder pin 6 mm, slim line termination grid 5.08 x 5.08 mm</i>	2 (Au/Sn)		04 Ff32z+df1x12-co <b>Order-No. 0423012</b>	04 Ff48fi1x12-co <b>Order-No. 0423112</b>	
Faston <i>faston</i>	2 (Au/Sn)	04 Ff32z+bfa2,8/2-co <b>Order-No. 042102</b>		04 Ff48fa2,8/2-co <b>Order-No. 042052</b>	
Gabelfaston <i>faston (fork)</i>	2 (Au/Sn)		04 Ff32z+dgfa2,8/2-co <b>Order-No. 042162</b>		
Kodierkeile (grün) <i>coding key (green)</i>					06 F24H7-cod <b>Order-No. 0401115600C99</b>

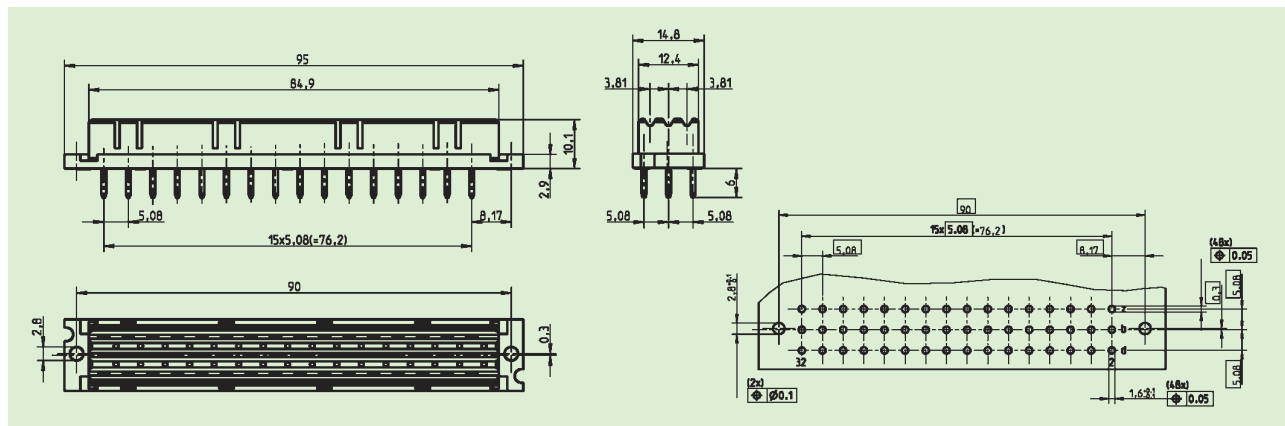

Technische Daten Seite 16 und 17.  
 Technical specifications page 16 and 17.

